



**Strobe Light Kit**  
**GrandStand® Mower**  
 Model No. 133-1495

**Installation Instructions**

**▲ WARNING**

**CALIFORNIA**  
**Proposition 65 Warning**

This product contains a chemical or chemicals known to the State of California to cause cancer, birth defects, or reproductive harm.

**Note:** You must install the Light Kit (sold separately) before installing this kit.

# Installation

## Loose Parts


Use the chart below to verify that all parts have been shipped.

Description	Qty.	Use
Strobe-light assembly	2	Install the kit.
Screw	4	
Nut	4	

## Installing the Kit

1. Shut off the engine, wait for all moving parts to stop, engage the parking brake, and remove the key.
2. Remove the negative (-) battery cable from the battery.
3. Remove the fuel tank; refer to the *Operator's Manual* for the machine.
4. Feed the wire for 1 strobe light through the hole on the side of the machine shown in [Figure 1](#) and secure the light with 2 bolts and 2 nuts.

**Note:** Repeat this step for the other strobe light on the other side of the machine.

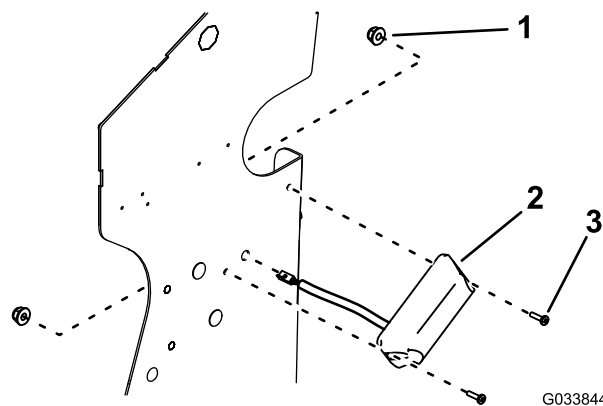


**Figure 1**

Left Side of the Machine Shown

- 1. Nut
- 2. Strobe light
- 3. Screw



5. Install the wire connectors into the designated jacks in the light-kit wire harness (Figure 2).

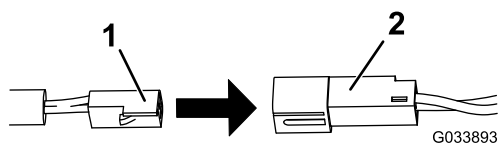

**Figure 2**

1. Strobe-light wire connector
  2. Light-kit wire harness
- 

6. Install the fuel tank; refer to the *Operator's Manual* for the machine.
7. Install the negative (-) battery cable to the battery.