



Strobe Light Kit

GrandStand® Mower

Model No. 133-1495

Installation Instructions

▲ WARNING

CALIFORNIA Proposition 65 Warning

This product contains a chemical or chemicals known to the State of California to cause cancer, birth defects, or reproductive harm.

Note: You must install the Light Kit (sold separately) before installing this kit.

Installation

Loose Parts

Use the chart below to verify that all parts have been shipped.

Description	Qty.	Use
Strobe-light assembly	2	Install the kit.
Screw	4	
Nut	4	

Installing the Kit

1. Shut off the engine, wait for all moving parts to stop, engage the parking brake, and remove the key.
2. Remove the negative (-) battery cable from the battery.
3. Remove the fuel tank; refer to the *Operator's Manual* for the machine.
4. Feed the wire for 1 strobe light through the hole on the side of the machine shown in [Figure 1](#) and secure the light with 2 bolts and 2 nuts.

Note: Repeat this step for the other strobe light on the other side of the machine.

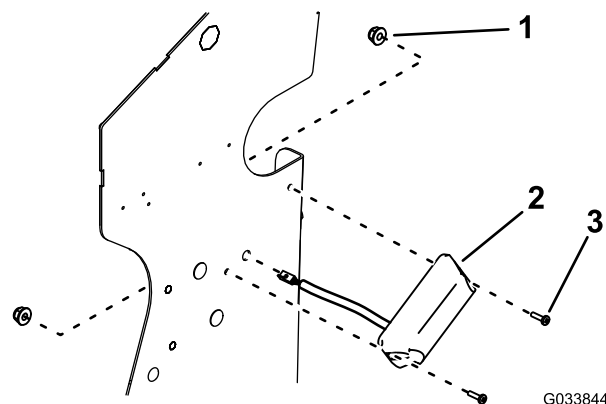


Figure 1

Left Side of the Machine Shown

1. Nut
2. Strobe light
3. Screw



5. Install the wire connectors into the designated jacks in the light-kit wire harness (Figure 2).

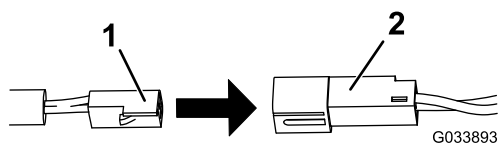


Figure 2

1. Strobe-light wire connector
 2. Light-kit wire harness
-

6. Install the fuel tank; refer to the *Operator's Manual* for the machine.
7. Install the negative (-) battery cable to the battery.