



Speed Control Removal Kit

2010 and Before GrandStand® Mower

Model No. 119-7380

Addendum

Installing the Cable Lock

Note: Discard the original spring clip that was installed on the cross bracket (step 40). Use the cable lock in its place.

1. Apply the hydraulic tracking decal (119-1854) to the cross bracket listed in step 51 before installing the cable lock in step 40.
2. Install the cable lock onto the cable adjusting nuts to secure the adjustment (Figure 1).

Using the Cable Lock

Remove the cable lock to adjust the tracking or align the motion control levers front to back.

1. Lift and remove the cable lock securing the cable adjusting nuts (Figure 1).
2. Adjust the tracking or align the motion control levers front to back. Refer to the *Operator's Manual* for the correct procedures.
3. Install the cable lock onto the cable adjusting nuts to secure the adjustment (Figure 1).

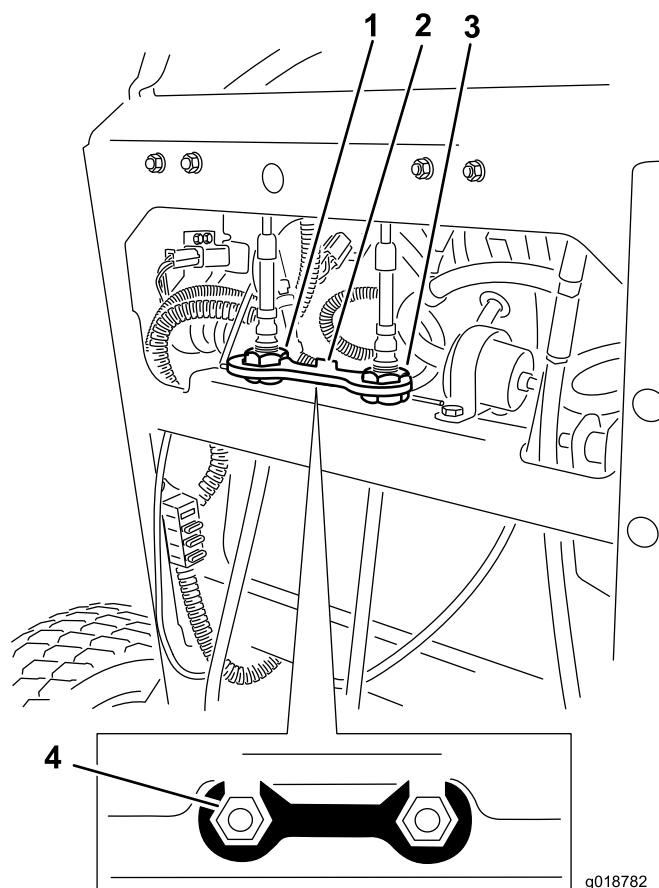


Figure 1

- | | |
|--------------------------|--|
| 1. Left cable adjustment | 3. Right cable adjustment |
| 2. Cable lock | 4. Align the cable adjustment nuts to install the cable lock |





Count on it.