

PREMIUM DRIP TAPE

TORO[®]

Aqua-Traxx[®]

Aqua-Traxx[®]
with the **PBX Advantage**

Aqua-Traxx[®] **FC**
with the **PBX Advantage**

THE EVOLUTION OF PRECISION

Market demands, weather patterns and resource availability change every day, so precision agriculture practices must evolve to stay ahead. From increasing yield and improving quality to making the best use of available resources. Irrigation technology is evolving, too — first flood, then pivot and now drip irrigation. Each step giving you more precise control over the time, energy and water you invest in your crop.

Toro Aqua-Traxx® premium drip tapes are innovative steps in the evolution of drip irrigation. Aqua-Traxx, the original premium drip tape, provides unmatched clog resistance, durability and precision placement of your valuable water and fertilizer. New Aqua-Traxx FC — the only flow-controlling drip tape available — is Toro's latest advancement in the evolution of drip irrigation, giving you increased uniformity and control wherever you farm.



Aqua-Traxx®

with the PBX Advantage



The Standard in Drip Irrigation

Aqua-Traxx® premium drip tape can help you increase yield and water-use efficiency, and also improve crop quality by putting water and fertilizer right where you need them. Choose emitter spacing from 4 to 24 inches — with no cost increase — for precise placement and flexibility when designing your system. Find the perfect tape for your application with a wide variety of available flow rates, wall thicknesses and internal diameters, most requiring just 140-mesh filtration. The PBX Advantage increases durability, clog resistance and uniformity to set Aqua-Traxx apart from lesser drip tapes.

- Emitter spacing options for all soils
- Widest selection of flow rates
- Accurate delivery of water and fertilizer
- Superior clogging resistance


The PBX Advantage:

Aqua-Traxx® and new Aqua-Traxx FC premium drip tapes are designed and molded with a high level of precision, resulting in manufacturing consistency over 97 percent — the best in the industry. With Aqua-Traxx, you get greater reliability and more uniform output compared to lesser tapes: That's the PBX Advantage.

Precision-molded emitters resist clogging and promote uniform output

Proportionally Balanced Cross-Section (PBX) increases flow turbulence and velocity

Engineering-grade virgin resins and seamless construction add durability

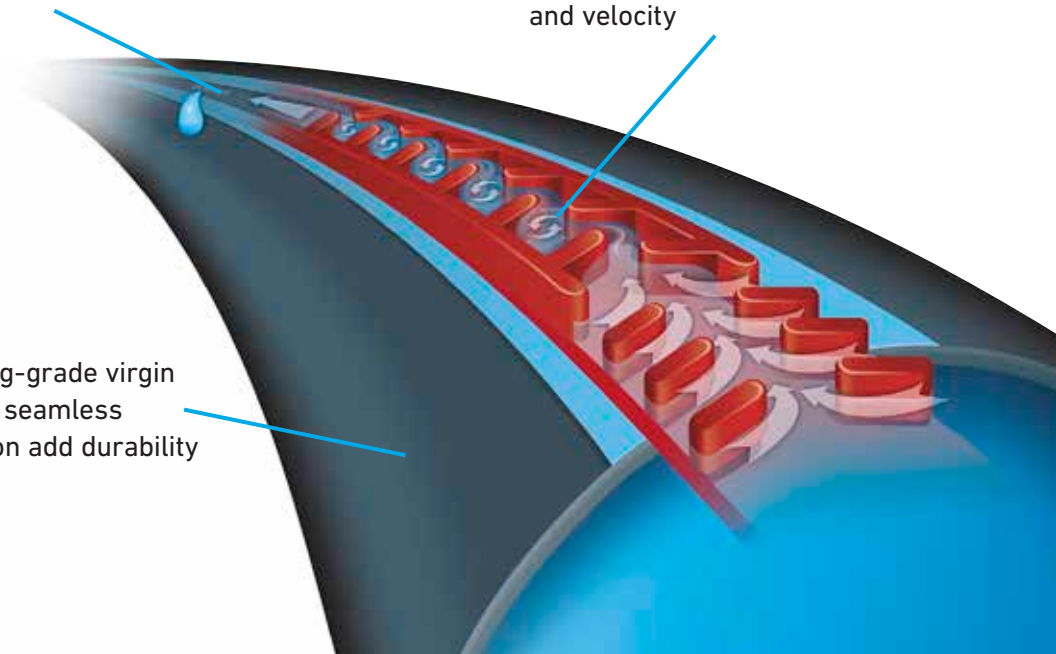

Aqua-Traxx[®] FC

with the PBX Advantage



The Next Level of Uniformity, Efficiency and Yield

The new Toro Aqua-Traxx[®] Flow Control (FC) drip tape is the latest advancement in the evolution of precision drip irrigation. It's the only flow-controlling drip tape available — giving you more control and uniformity wherever you farm. The innovative flow-controlling design provides you with the flexibility to increase or decrease flow while maintaining a uniform output across changing elevations. Now you have more control over how much water your crops get, especially in long runs or hilly terrain, where water pressure can vary throughout the run.

ADVANTAGE

1

MORE UNIFORM OUTPUT FOR ANY TERRAIN

STANDARD TAPE

Standard tapes stress plants and reduce yield and efficiency by over- or under-watering as pressure changes throughout the run.

RESULT: Wasted water and fertilizer, stressed plants and reduced yields.

AQUA-TRAXX[®] FC

Toro Aqua-Traxx FC gives you uniform output regardless of elevation changes. So now you can adjust the amount of water you give your plants on hilly terrain, and they'll all receive the same amount through our uniform delivery system.

RESULT: More uniform plants and higher yields even in hilly terrain that might otherwise be impractical to farm.

Same Inlet Pressure



FEATURES:

- Designed and molded with the PBX Advantage for increased durability, clog resistance and uniform output
- Flexibility to increase and decrease flow without sacrificing uniformity
- Available in three diameters and five wall thicknesses, including more-affordable 5/8-inch 6 mil and 7/8-inch 8 mil
- Emitter spacing from 6–24 inches with no cost increase, for precise placement and flexibility when designing your system
- All flow rates require just 150-mesh filtration



ADVANTAGE


2

THE ABILITY TO CONTROL THE FLOW

AQUA-TRAXX® FC

Toro Aqua-Traxx FC puts you in control of watering decisions. You control how much water your plants receive by increasing or decreasing the operating pressure — without sacrificing uniformity.

RESULT: More uniform delivery of water and fertilizer to the roots of your plants with the flexibility to control application rates.

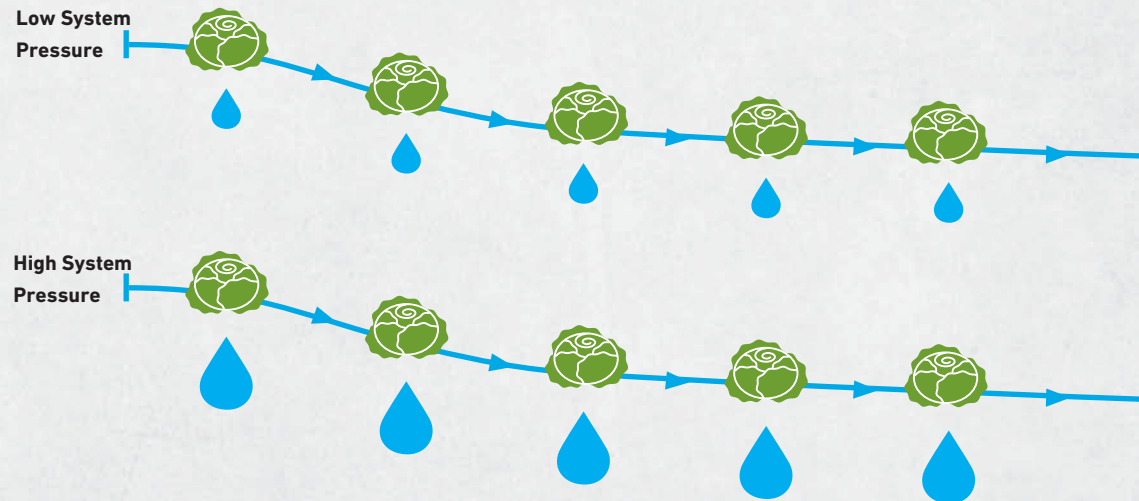

Aqua-Traxx FLOW RATES														
Emitter Flow Part Number	Outlet Spacing		Emitter Flow Rate				Q-100				Emitter Exponent	Filtration Requirement		
			gph		lph		gpm/100 ft		lph/1 meter					
			@ 8 psi	@ 10 psi	@ 0.55 bar	@ 0.7 bar	@ 8 psi	@ 10 psi	@ 0.55 bar	@ 0.7 bar				
in	cm											mesh (micron)		
0.07 gph emitter														
EAXxx0817	8	20	0.07	0.08	0.26	0.30	0.17	0.20	1.30	1.47	0.55	200 (74)		
EAXxx1609	16	40	0.07	0.08	0.26	0.30	0.09	0.10	0.65	0.74				
0.09 gph emitter														
EAXxx0822	8	20	0.09	0.10	0.34	0.38	0.22	0.25	1.66	1.88	0.55	200 (74)		
EAXxx1611	16	40	0.09	0.10	0.34	0.38	0.11	0.13	0.83	0.94				
0.10 gph emitter														
EAXxx0825	8	20	0.10	0.11	0.38	0.43	0.25	0.28	1.86	2.11	0.55	200 (74)		
EAXxx1613	16	40	0.10	0.11	0.38	0.43	0.13	0.14	0.93	1.05				
0.13 gph emitter														
EAXxx0467	4	10	0.13	0.15	0.51	0.57	0.67	0.75	4.99	5.58	0.5	140 (105)		
EAXxx0644	6	15	0.13	0.15	0.51	0.57	0.44	0.50	3.33	3.72				
EAXxx0834	8	20	0.13	0.15	0.51	0.57	0.34	0.37	2.50	2.79				
EAXxx1222	12	30	0.13	0.15	0.51	0.57	0.22	0.25	1.66	1.86				
EAXxx1617	16	40	0.13	0.15	0.51	0.57	0.17	0.19	1.25	1.40				
EAXxx1814	18	45	0.13	0.15	0.51	0.57	0.14	0.17	1.11	1.24				
EAXxx2411	24	60	0.13	0.15	0.51	0.57	0.11	0.12	0.83	0.93				
0.15 gph emitter														
EAXxx0650	6	15	0.15	0.17	0.57	0.63	0.50	0.56	3.73	4.17			0.5	140 (105)
EAXxx1225	12	30	0.15	0.17	0.57	0.63	0.25	0.28	1.86	2.08				
EAXxx1817	18	45	0.15	0.17	0.57	0.63	0.17	0.19	1.24	1.39				
0.20 gph emitter														
EAXxx04100	4	10	0.20	0.22	0.76	0.85	1.00	1.12	7.47	8.36	0.5	140 (105)		
EAXxx0667	6	15	0.20	0.22	0.76	0.85	0.67	0.75	4.99	5.58				
EAXxx0850	8	20	0.20	0.22	0.76	0.85	0.50	0.56	3.74	4.18				
EAXxx1234	12	30	0.20	0.22	0.76	0.85	0.34	0.37	2.50	2.79				
EAXxx1625	16	40	0.20	0.22	0.76	0.85	0.25	0.28	1.87	2.09				
EAXxx1822	18	45	0.20	0.22	0.76	0.85	0.22	0.25	1.67	1.86				
EAXxx2417	24	60	0.20	0.22	0.76	0.85	0.17	0.19	1.25	1.40				
0.27 gph emitter														
EAXxx04134	4	10	0.27	0.30	1.01	1.13	1.34	1.50	9.99	11.16			0.5	140 (105)
EAXxx0690	6	15	0.27	0.30	1.01	1.13	0.90	1.00	6.66	7.44				
EAXxx0867	8	20	0.27	0.30	1.01	1.13	0.67	0.75	4.99	5.58				
EAXxx1245	12	30	0.27	0.30	1.01	1.13	0.45	0.50	3.33	3.72				
EAXxx1634	16	40	0.27	0.30	1.01	1.13	0.34	0.37	2.50	2.79				
EAXxx1830	18	45	0.27	0.30	1.01	1.13	0.30	0.33	2.22	2.48				
EAXxx2422	24	60	0.27	0.30	1.01	1.13	0.22	0.25	1.67	1.86				
0.34 gph emitter														
EAXxx04168	4	10	0.34	0.37	1.27	1.42	1.68	1.87	12.48	13.95	0.5	140 (105)		
EAXxx06112	6	15	0.34	0.37	1.27	1.42	1.12	1.25	8.33	9.31				
EAXxx0884	8	20	0.34	0.37	1.27	1.42	0.84	0.94	6.24	6.98				
EAXxx1256	12	30	0.34	0.37	1.27	1.42	0.56	0.62	4.16	4.65				
EAXxx1642	16	40	0.34	0.37	1.27	1.42	0.42	0.47	3.12	3.49				
EAXxx1838	18	45	0.34	0.37	1.27	1.42	0.38	0.42	2.78	3.10				
EAXxx2428	24	60	0.34	0.37	1.27	1.42	0.28	0.31	2.08	2.33				
0.53 gph emitter														
EAXxx04265	4	10	0.53	0.59	2.01	2.24	2.65	2.96	19.75	22.08			0.5	140 (105)
EAXxx08133	8	20	0.53	0.59	2.01	2.24	1.33	1.48	9.87	11.04				
EAXxx1288	12	30	0.53	0.59	2.01	2.24	0.88	0.99	6.58	7.36				
EAXxx1666	16	40	0.53	0.59	2.01	2.24	0.66	0.74	4.94	5.52				
EAXxx2444	24	60	0.53	0.59	2.01	2.24	0.44	0.49	3.29	3.68				
EAXxx3629	36	90	0.53	0.59	2.01	2.24	0.29	0.33	2.19	2.45				

Aqua-Traxx WALL THICKNESS									
Diameter	Wall Thickness	Operating Pressure				Reel Length		Reel Weight	
		psi		bar		ft	meters	lbs	kg
		min	max	min	max				
5/8" (16mm) 0.635"	4 mil	4	8	0.3	0.55	15,000	4,572	66	30
	5 mil	4	10	0.3	0.7	13,000	3,962	72	33
	6 mil	4	12	0.3	0.8	10,000	3,048	64	29
	8 mil	4	15	0.3	1.0	7,500	2,286	66	30
	10 mil	4	15	0.3	1.0	6,000	1,829	63	29
	12 mil	4	15	0.3	1.0	5,100	1,554	63	29
5/8" (16mm) Short Reels 0.635"	15 mil	4	15	0.3	1.0	4,000	1,219	63	29
	6 mil	4	12	0.3	0.8	2,500	762	17	8
	8 mil	4	15	0.3	1.0	2,000	610	17	8
7/8" (22mm) 0.880"	15 mil	4	15	0.3	1.0	1,000	305	16	7
	6 mil	4	10	0.3	0.7	7,380	2,250	68	31
	8 mil	4	15	0.3	1.0	6,000	1,829	72	33
	10 mil	4	15	0.3	1.0	4,400	1,341	71	32
	12 mil	4	15	0.3	1.0	4,000	1,219	72	33
1" (25mm) 0.990"	15 mil	4	15	0.3	1.0	3,000	914	66	30
	13 mil	4	15	0.3	1.0	3,000	914	66	30
	15 mil	4	15	0.3	1.0	3,000	914	71	32
1 1/8" (28mm) 1.130"	15 mil	4	15	0.3	1.0	3,000	914	71	32
	15 mil	4	15	0.3	1.0	2,700	823	87	39

KEY
PART NUMBER: EA 5 05 04 67 - 1300
EA = Aqua-Traxx with the PBX Advantage
EAFC = Aqua-Traxx FC
5 = Diameter (inch)
05 = Mil Thickness
04 = Emitter Spacing (inch)
67 = Flow Rate (gph/100)
1300 = Reel Length (feet/10)

*X denotes the diameter. 5 for 5/8", 7 for 7/8", 8 for 1", 9 for 1 1/8" and 11 for 1 3/8"
***xx denotes mil thickness.
***1" only available in 13 mil; 1 1/8" only available in 15 mil; 1 3/8" only available in 15 mil.
Metric outlet spacing expressed in nominal length.
Coefficient of Variation (Cv) Less than 3%.


Aqua-Traxx FC FLOW RATES

Emitter Flow Part Number	Outlet Spacing		Emitter Flow Rate				Emitter Exponent	Filtration Requirement
			Q-100		gpm/100 ft	lph/1 meter		
			gph	lph				
		@ 10 psi	@ 0.7 bar	@ 10 psi	@ 0.7 bar	mesh (micron)		
0.13 gph emitter								
EAF CXxx1222	12	30	0.13	0.51	0.22	1.66	0.3	150 (98)
EAF CXxx2411	24	60	0.13	0.51	0.11	0.83		
0.20 gph emitter								
EAF CXxx0667	6	15	0.20	0.76	0.67	4.99	0.3	150 (98)
EAF CXxx0850	8	20	0.20	0.76	0.50	3.74		
EAF CXxx1234	12	30	0.20	0.76	0.34	2.50		
EAF CXxx1625	16	40	0.20	0.76	0.25	1.87		
EAF CXxx1822	18	45	0.20	0.76	0.22	1.67		
EAF CXxx2417	24	60	0.20	0.76	0.17	1.25		
0.27 gph emitter								
EAF CXxx0690	6	15	0.27	1.01	0.90	6.66	0.3	150 (98)
EAF CXxx0867	8	20	0.27	1.01	0.67	4.99		
EAF CXxx1245	12	30	0.27	1.01	0.45	3.33		
EAF CXxx1634	16	40	0.27	1.01	0.34	2.50		
EAF CXxx1830	18	45	0.27	1.01	0.30	2.22		
EAF CXxx2422	24	60	0.27	1.01	0.22	1.67		

Aqua-Traxx FC WALL THICKNESS

Diameter	Wall Thickness	Operating Pressure				Reel Length		Reel Weight	
		psi		bar		ft	meters	lbs	kg
		min	max	min	max				
5/8" (16mm) 0.635"	6 mil	4	16	0.3	1.1	10,000	3,048	64	29
	8 mil	4	16	0.3	1.1	7,500	2,286	66	30
	10 mil	4	25	0.3	1.7	6,000	1,829	63	29
	12 mil	4	25	0.3	1.7	5,100	1,554	63	29
	15 mil	4	25	0.3	1.7	4,000	1,219	63	29
7/8" (22mm) 0.880"	8 mil	4	15	0.3	1.0	6,000	1,829	72	33
	10 mil	4	20	0.3	1.4	4,400	1,341	71	32
	12 mil	4	20	0.3	1.4	4,000	1,219	72	33
1 3/8" (35mm) 1.380"	15 mil	4	22	0.3	1.5	3,000	914	66	30
	15 mil	4	18	0.3	1.3	2,700	823	87	39

Emitter Flow vs Pressure

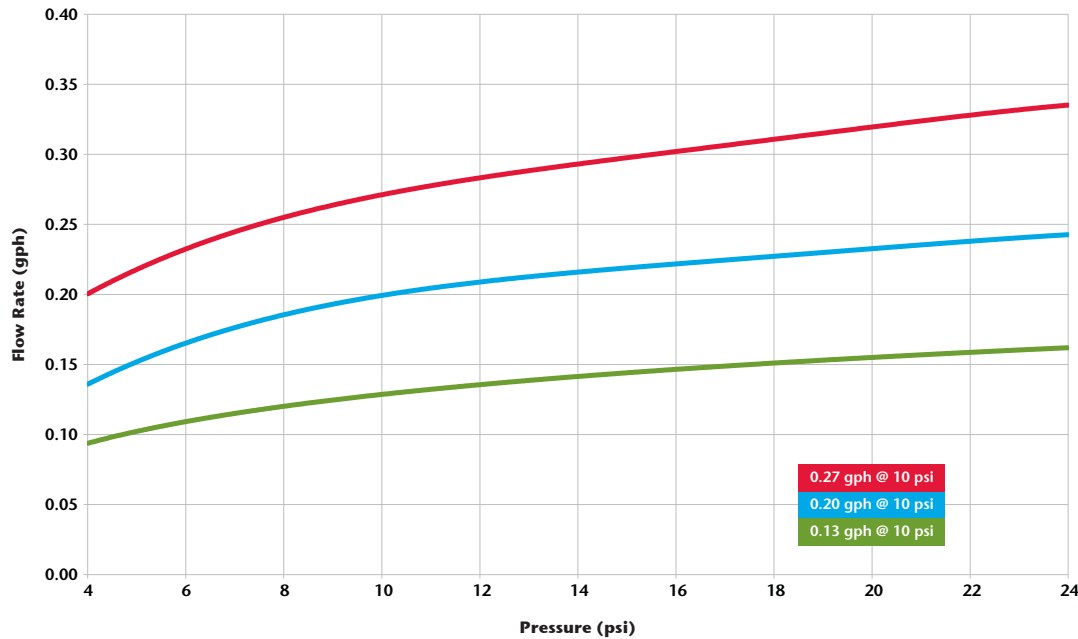

There is a Toro Aqua-Traxx[®] and Aqua-Traxx FC premium drip tape for every application. Call your local Toro dealer if you have any questions about choosing the best tape for your crop, soil type and terrain. You can also find AquaFlow, Toro's drip irrigation system design program, at driptips.toro.com.



Visit toro.com or call (800) 333-8125 for more information or to find your nearest Toro dealer.

Visit driptips.toro.com to learn more about drip irrigation and how it can help your farm.



©2015 The Toro Company
Micro-Irrigation Business
1588 N. Marshall Avenue
El Cajon, CA 92020-1523, USA

Tel: +1 (800) 333-8125 or +1 (619) 562-2950
Fax: +1 (800) 892-1822 or +1 (619) 258-9973
toro.com
driptips.toro.com

ALT230 09/15