



Model No. 04480—20000001 & Up
Model No. 04481—20000001 & Up

Operator's
Manual

8 & 11 Blade Cutting Units
(For Greensmaster® 3200 Series)

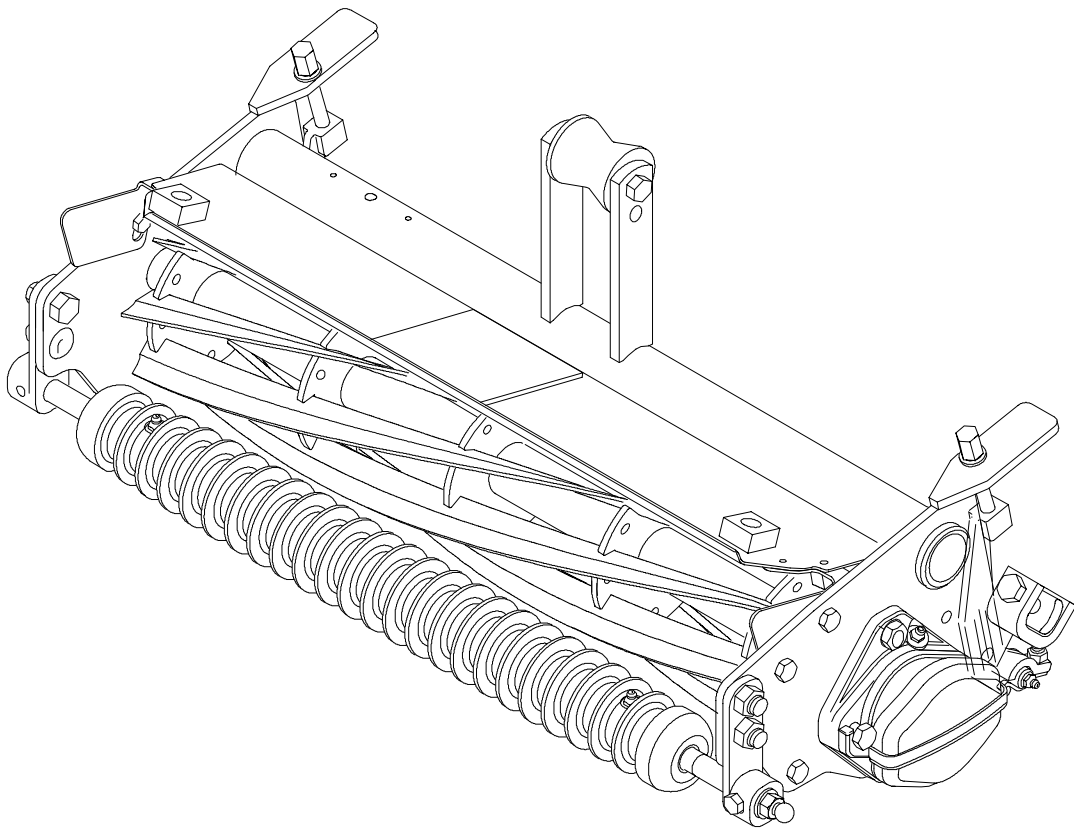


TABLE OF CONTENTS

	Page		Page
SPECIFICATIONS	2	OPERATING INSTRUCTIONS	5
ADJUSTING CUTTING UNIT	3	Cutting Unit Daily Adjustments	5
Adjusting Bedknife To Reel	3	LUBRICATION	6
Choosing Cutting Unit Attitude	4	Greasing Bearings And Bushings	6
Leveling Front Roller To Reel	3	BACKLAPPING CUTTING UNITS	6
Adjusting Top Shield Height	4	NOTES	7
Adjusting Top Bar	4	TORO PROMISE	8
Adjusting Height-of-Cut	5		

SPECIFICATIONS

Height-of-Cut: Cutting height is adjusted on rear roller by two vertical screws and held by two locking capscrews. Bench HOC range is 3/32" (2.4mm) to 1-1/32" (26mm). Cutting units will deliver differing effective height of cuts depending on their configuration. In fact, effective cutting height may be influenced by the following factors; turf conditions, roller profiles, cutting unit attitude, cutting unit accessories, weight of cutting units and bedknife profile. Therefore benchsetting a cutting unit does not equal the effective (actual) height of cut you achieve. You need to determine how to adjust your cutter on the bench to achieve a comparable height of cut to a cutting unit of a different configuration, model or brand.

Reel Construction: Reels are 5 inches (13cm) in diameter, 21 inches (53.3 cm) in length. High carbon steel blades are welded to 5 stamped steel spiders. and heat treated to RC 48-54 hardness. The reel is ground for diameter, concentricity. and back grind.

Reel Bearings: Two double row ball bearings, 30 mm I.D., press fit onto reel shaft. Inverted seal pressed onto reel shaft. Bearing side load maintained by a 3 1/2 turn wave washer, no adjusting nut.

Reel Drive: The reel weldment shaft is a 1.375 inch diameter tube with drive inserts permanently pressed in both ends. A replaceable floating coupler with an internal eight tooth spline is factory installed on the right end, and held in place by a snap ring. The floating coupler may be moved to the other end when the cutting unit is used on the tractor front right position.

Frame Construction: Single top tube is welded to two sideplates. A bolt-in cross rod acts to set the front frame width and stiffen the assembly. The lift straps have a replaceable roller that may be moved to change transport height.

Bedknife: Replaceable, 13 screw, single edged, high carbon steel bedknife austempered to RC 48-55, fastened to a machined cast iron bedbar. Tournament bedknife is standard.

Bedknife Adjustment: Two opposing screws on each end of the bed bar are used to level and regulate bedknife to reel contact.

Front Roller: Standard front roller is 2.5 inch (6.4 cm) diameter full radius Wiehle. Right bracket has an eccentric shoulder bolt to provide leveling. A second eccentric may be added to the left bracket for increased leveling range. Roller has a through shaft with greaseable ball bearings.

Rear Roller: Standard rear roller is 2 inch (5.2 cm) diameter smooth steel roller. Roller has a through shaft with greaseable ball bearings.

Counterbalance Weight: The left end of cutting unit has a weight with a Spin flange like the reel motors for easy installation. The weight seals the bearing area and balances the reel motor's weight during cutting.

Options;

Micro Cut Bedknife	Part No. 93-4262
Lo Cut Bedknife	Part No. 93-4264
High Cut Bedknife	Part No. 94-6392
Fairway Bedknife	Part No. 94-6393
5 Blade Heavy Duty Reel	Part No. 98-2181
8 Blade Heavy Duty Reel	Part No. 98-2182
High Height-of-Cut Kit	Part No. 99-1496
Wiehle Rear Roller	Model No. 04488
Full Front Roller	Model No. 04486

Specifications and design subject to change without notice.

ADJUSTING CUTTING UNITS

IMPORTANT: Read this Operator's Manual thoroughly before operating cutting unit. Failure to do so may result in damage to the cutting unit.

Note: Left and right sides of cutting unit refer to normal operating position.

After the cutting unit is unboxed, use the following procedures to assure the cutting units are adjusted properly.

1. Check each end of the reel for grease. Grease should be visibly evident in the reel bearings.
2. Insure that all nuts and bolts are securely fastened.
3. Position lift roller to match suspension.
 - Upper position for standard transport height
 - Lower position for increased transport height
4. Check to make sure bedknife and reel are parallel. Refer to Adjusting Bedknife to Reel, page 3.

ADJUSTING BEDKNIFE TO REEL

(Fig. 1 & 2)

1. Remove cutting units from traction unit and position on a level work surface.
2. Adjustment of bedknife to reel is accomplished by first, loosening bottom adjusting screw on each side of cutting unit, then tightening the top adjusting screw on each side of cutting unit. This adjustment will position the bedknife closer to the reel blades.

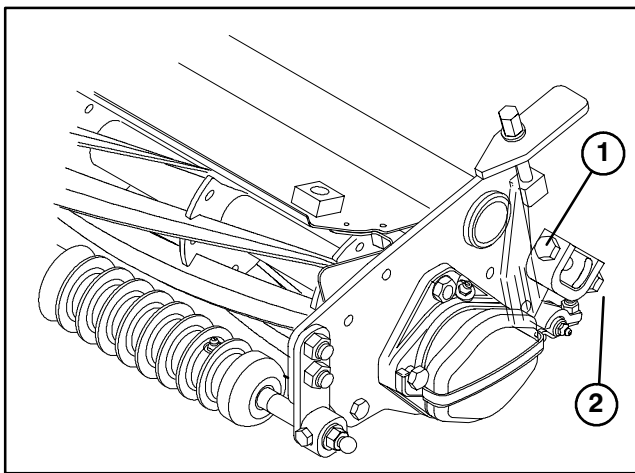


Figure 1

1. Top adjusting screw
2. Bottom adjusting screw

IMPORTANT: Use only a M13 wrench, 3" to 6" in length when adjusting bedknife screws. A longer wrench will provide too much leverage and may cause distortion of the mounting plate for the adjustment screws.

3. After adjusting bedknife to reel, make sure that both top and bottom adjusting screws are secured on both ends of cutting unit.

4. After the adjustment is accomplished, check to see if the reel can pinch paper when inserted from the front and cut paper when inserted at a right angle. It should be possible to cut paper with minimum contact between the bedknife and the reel blades.

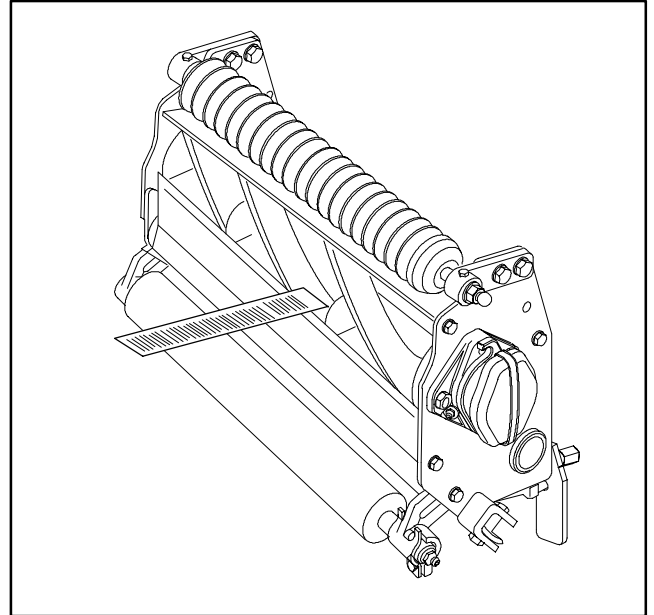



Figure 2

CHOOSING CUTTING UNIT ATTITUDE

There are four positions for the front roller brackets.

Position 1: Least aggressive; use for very soft and tender turf.

HOC Range – .125" (1/8")–1.03" (1–1/32")
3.2mm – 26mm

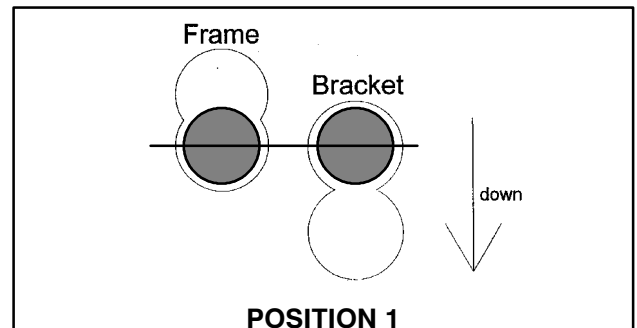


POSITION 1

Position 2: Standard position; use for most conditions. (Factory Setting)

HOC Range – .094" (3/32")–.934" (15/16")
2.4mm – 24mm


Note: The top frame hole and top bracket hole will yield Position 2 (standard position).

ADJUSTING CUTTING UNITS

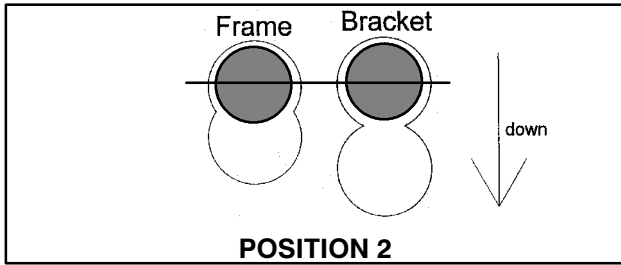


Position 3: More aggressive; use on firm turf or higher Height-of-Cuts.

HOC Range – .094" (3/32")–.813" (13/16")
2.4mm – 21mm

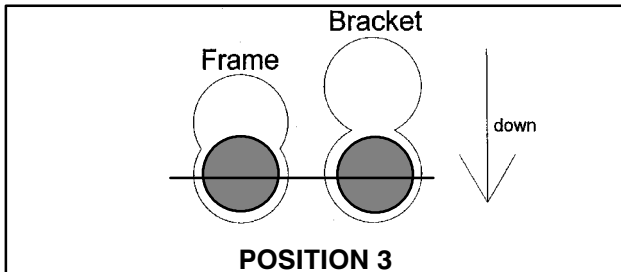

Position 4: Most aggressive; use only on very firm greens or at the higher Height-of-Cuts.

HOC Range – .094" (3/32")–.75" (3/4") 2.4mm – 19mm

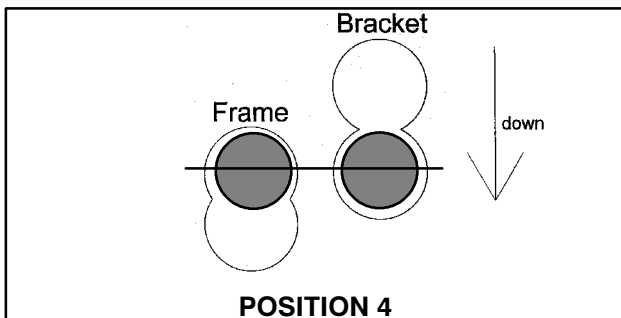

Note: A more aggressive setting will increase grass removal and provide a cleaner cut, but may cause increased scalping and marking.

Note: A more aggressive setting will be required to compensate for reel wear.

LEVELING FRONT ROLLER TO REEL

(Fig. 3)

1. Position Cutting Unit on a flat, level surface.
2. Position a 1/4 inch or thicker plate under the reel blades and against the front face of the bedknife.

Note: Be sure the plate covers the full length of reel blades and three blades contact plate.

3. Loosen locknuts retaining right front roller bracket.

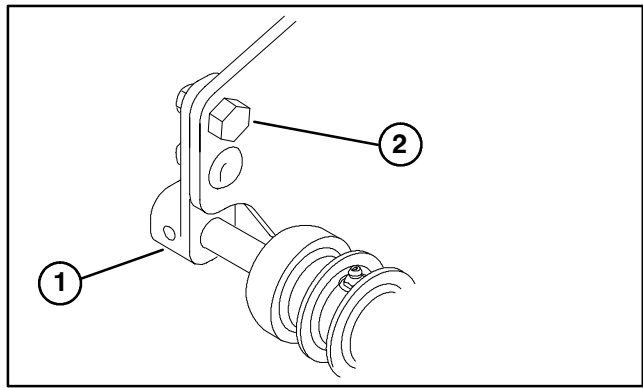


Figure 3

1. Right front roller bracket
2. Upper right roller mounting bolt

4. While holding reel securely on plate and maintaining pressure on front roller, rotate upper right roller mounting bolt. This mounting bolt has an offset, which when rotated, acts as an eccentric (cam) to raise or lower the roller. On the bolt head there is an I.D. dot which denotes the offset of the bolt. Dot indicates in which direction right end of roller moves when bolt is turned.

Note: If additional adjustment is required, replace one screw on L.H. bracket with another eccentric bolt, part no. 93–2573. Insure both front roller brackets are in the same hole.

5. To verify if roller is level, try inserting a piece of paper under each end of roller.

6. When roller is level, tighten nuts securely.

ADJUSTING TOP SHIELD HEIGHT

1. Loosen capscrews and nuts securing shield to each side plate.
2. Adjust shield to desired position and secure fasteners
3. Repeat procedure on remaining cutting units and adjust top bar.

Note: Shield can be raised for extreme wet conditions.

ADJUSTING TOP BAR

Adjust top bar, under rear shield, to assure clippings are cleanly discharged from reel area.

1. Loosen screws securing top bar. Insert 0.060 inch (1.5 mm) feeler gauge between top of reel and bar and tighten screws. Assure bar and reel are equal distance apart across complete reel.
2. Repeat settings on remaining cutting units.

NOTE: Bar is adjustable to compensate for changes in turf conditions. Bar should be adjusted closer to reel when turf is extremely wet. By contrast, adjust bar further away from reel when turf conditions are dry. Bar should be adjusted when ever top shield height is changed.

ADJUSTING CUTTING UNITS

ADJUSTING HEIGHT-OF-CUT

1. Verify that front roller is level and bedknife to reel contact is correct.
2. Turn cutting unit over (90°) and rest it on rear roller and top rear tabs. Loosen locknuts on capscrews retaining rear roller brackets.
3. On gauge bar (Part no. 13-8199), set head of screw to desired height of cut. This measurement is from bar face to underside of screw head.

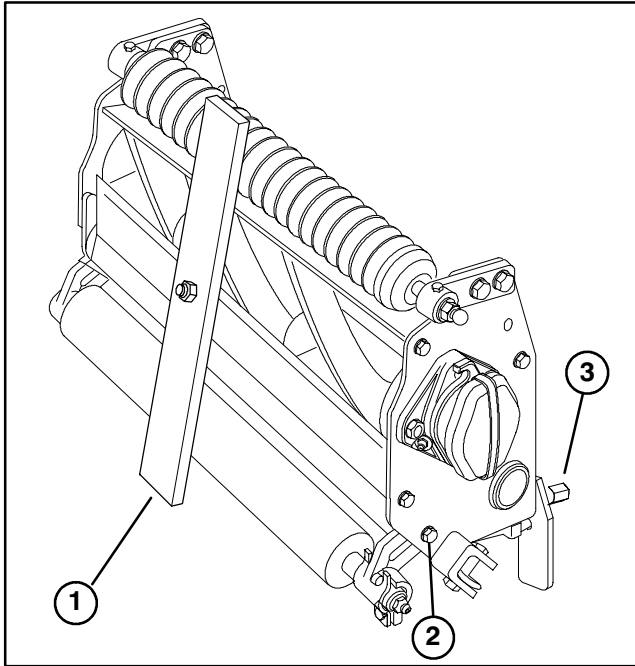


Figure 4

1. Gauge bar
2. Roller bracket capscrew
3. Height-of-cut knob

4. Place the bar across the front and rear rollers and adjust the height-of-cut knob until the underside of screw head engages the bedknife cutting edge.

IMPORTANT: Repeat procedure on each end of bedknife and tighten locknuts retaining rear roller brackets on each end.

NOTE: Cutting units will deliver differing effective height of cuts depending on their configuration. In fact, effective cutting height may be influenced by the following factors; turf conditions, roller profiles, cutting unit attitude, cutting unit accessories, weight of cutting units and bedknife profile. Therefore benchsetting a cutting unit does not equal the effective (actual) height of cut you achieve. You need to determine how to adjust your cutter on the bench to achieve a comparable height of cut to a cutting unit of a different configuration, model or brand.

OPERATING INSTRUCTIONS

CUTTING UNIT DAILY ADJUSTMENTS

Prior to each day's mowing, or as required, each cutting unit must be checked to verify proper bedknife-to-reel contact. **This must be performed even though quality of cut is acceptable.**

IMPORTANT: Light contact is preferred at all times. If light contact is not maintained, bedknife / reel edges will not sufficiently self-sharpen and dull cutting edges will result after a period of operation. If excessive contact is maintained, bedknife/reel wear will be accelerated, uneven wear can result, and quality of cut may be adversely affected.

Note: As the reel blades continue to run against the bedknife a slight burr will appear on the front cutting edge surface the full length of the bedknife. If a file is occasionally run across the front edge to remove this burr, improved cutting can be obtained.

After extended running, a ridge will eventually develop at both ends of the bedknife. These notches must be rounded off or filed flush with cutting edge of bedknife to assure smooth operation.

LUBRICATION

GREASING BEARINGS AND BUSHINGS

Each cutting unit has (6) grease fittings that must be lubricated regularly with No. 2 General Purpose Lithium Base Grease.

1. The grease fitting locations and quantities are: Reel bearings (2) and front and rear rollers (2 ea.) (Fig. 5)

IMPORTANT: Lubricating cutting units immediately after washing helps purge water out of bearings and increases bearing life.

1. Wipe each grease fitting with a clean rag.
2. Apply grease until pressure is felt against handle.

IMPORTANT: Do not apply too much pressure or grease seals will be permanently damaged.

3. Wipe excess grease away.

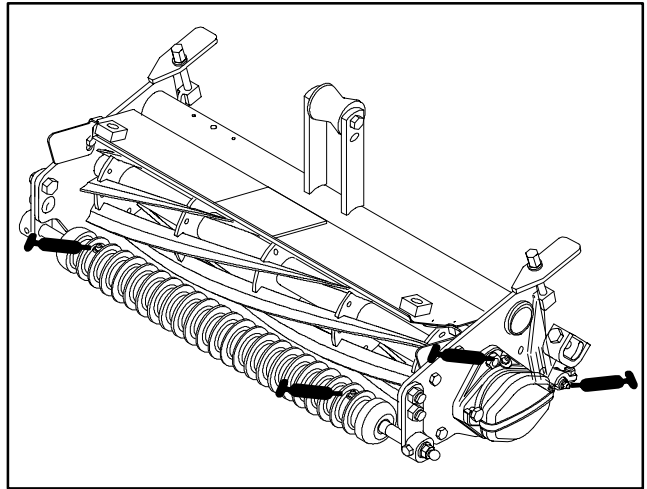


Figure 5

BACKLAPPING CUTTING UNITS



CAUTION

Be careful when lapping the reel because contact with the reel or other moving parts can result in personal injury.

1. Position machine on a clean, level surface, lower the cutting units, stop the engine, engage parking brake and remove key from ignition switch.
2. Remove reel motors from cutting units and disconnect and remove cutting units from lift arms.

3. Connect the backlapping machine to cutting unit by inserting a piece of 3/8" square stock into splined coupling at right end of cutting unit.

Note: Additional instructions and procedures on Backlapping are available in the TORO Sharpening Reel & Rotary Mowers Manual Form No. 80-300PT.

NOTE: For a better cutting edge, run a file across the front face of the bedknife when the lapping operation is completed. This will remove any burrs or rough edges that may have built up on the cutting edge.

NOTES



The Toro General Commercial Products Warranty

A Two-Year Limited Warranty

Conditions and Products Covered

The Toro Company and its affiliate, Toro Warranty Company, pursuant to an agreement between them, jointly warrant your 1996 or newer Toro Commercial Product ("Product") purchased after January 1, 1997, to be free from defects in materials or workmanship for two years or 1500 operational hours*, whichever occurs first. Where a warrantable condition exists, we will repair the Product at no cost to you including diagnosis, labor, parts, and transportation. This warranty begins on the date the Product is delivered to the original retail purchaser.

* Product equipped with hour meter

Instructions for Obtaining Warranty Service

You are responsible for notifying the Commercial Products Distributor or Authorized Commercial Products Dealer from whom you purchased the Product as soon as you believe a warrantable condition exists.

If you need help locating a Commercial Products Distributor or Authorized Dealer, or if you have questions regarding your warranty rights or responsibilities, you may contact us at:

Toro Commercial Products Service Department
Toro Warranty Company
8111 Lyndale Avenue South
Bloomington, MN 55420-1196
612-888-8801
800-982-2740
E-mail: commercial.service@toro.com

Owner Responsibilities

As the Product owner, you are responsible for required maintenance and adjustments stated in your operator's manual. Failure to perform required maintenance and adjustments can be grounds for disallowing a warranty claim.

Items and Conditions Not Covered

Not all product failures or malfunctions that occur during the warranty period are defects in materials or workmanship. This express warranty does not cover:

- Product failures which result from the use of non-Toro replacement parts, or from installation and use of add-on, modified, or unapproved accessories.
- Product failures which result from failure to perform required maintenance and/or adjustments.
- Product failures which result from operating the Product in an abusive, negligent or reckless manner.
- Parts subject to consumption through use unless found to be defective. Examples of parts which are consumed, or used up, during normal Product operation include, but are not limited to, blades, reels, bedknives, tines, spark plugs, castor wheels, tires, filters, belts, etc.

Countries Other than the United States or Canada

Customers who have purchased Toro products exported from the United States or Canada should contact their Toro Distributor (Dealer) to obtain guarantee policies for your country, province, or state. If for any reason you are dissatisfied with your Distributor's service or have difficulty obtaining guarantee information, contact the Toro importer. If all other remedies fail, you may contact us at Toro Warranty Company.

- Failures caused by outside influence. Items considered to be outside influence include, but are not limited to, weather, storage practices, contamination, use of unapproved coolants, lubricants, additives, or chemicals, etc.
- Normal "wear and tear" items. Normal "wear and tear" includes, but is not limited to, damage to seats due to wear or abrasion, worn painted surfaces, scratched decals or windows, etc.

Parts

Parts scheduled for replacement as required maintenance are warranted for the period of time up to the scheduled replacement time for that part.

Parts replaced under this warranty become the property of Toro. Toro will make the final decision whether to repair any existing part or assembly or replace it. Toro may use factory remanufactured parts rather than new parts for some warranty repairs.

General Conditions

Repair by an Authorized Toro Distributor or Dealer is your sole remedy under this warranty.

Neither The Toro Company nor Toro Warranty Company is liable for indirect, incidental or consequential damages in connection with the use of the Toro Products covered by this warranty, including any cost or expense of providing substitute equipment or service during reasonable periods of malfunction or non-use pending completion of repairs under this warranty. Except for the Emissions warranty referenced below, if applicable, there is no other express warranty. All implied warranties of merchantability and fitness for use are limited to the duration of this express warranty.

Some states do not allow exclusions of incidental or consequential damages, or limitations on how long an implied warranty lasts, so the above exclusions and limitations may not apply to you.

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

Note regarding engine warranty: The Emissions Control System on your Product may be covered by a separate warranty meeting requirements established by the U.S. Environmental Protection Agency (EPA) and/or the California Air Resources Board (CARB). The hour limitations set forth above do not apply to the Emissions Control System Warranty. Refer to the Engine Emission Control Warranty Statement printed in your operator's manual or contained in the engine manufacturer's documentation for details.